


COMPUTERIZED COMPRESSION TESTING MACHINE

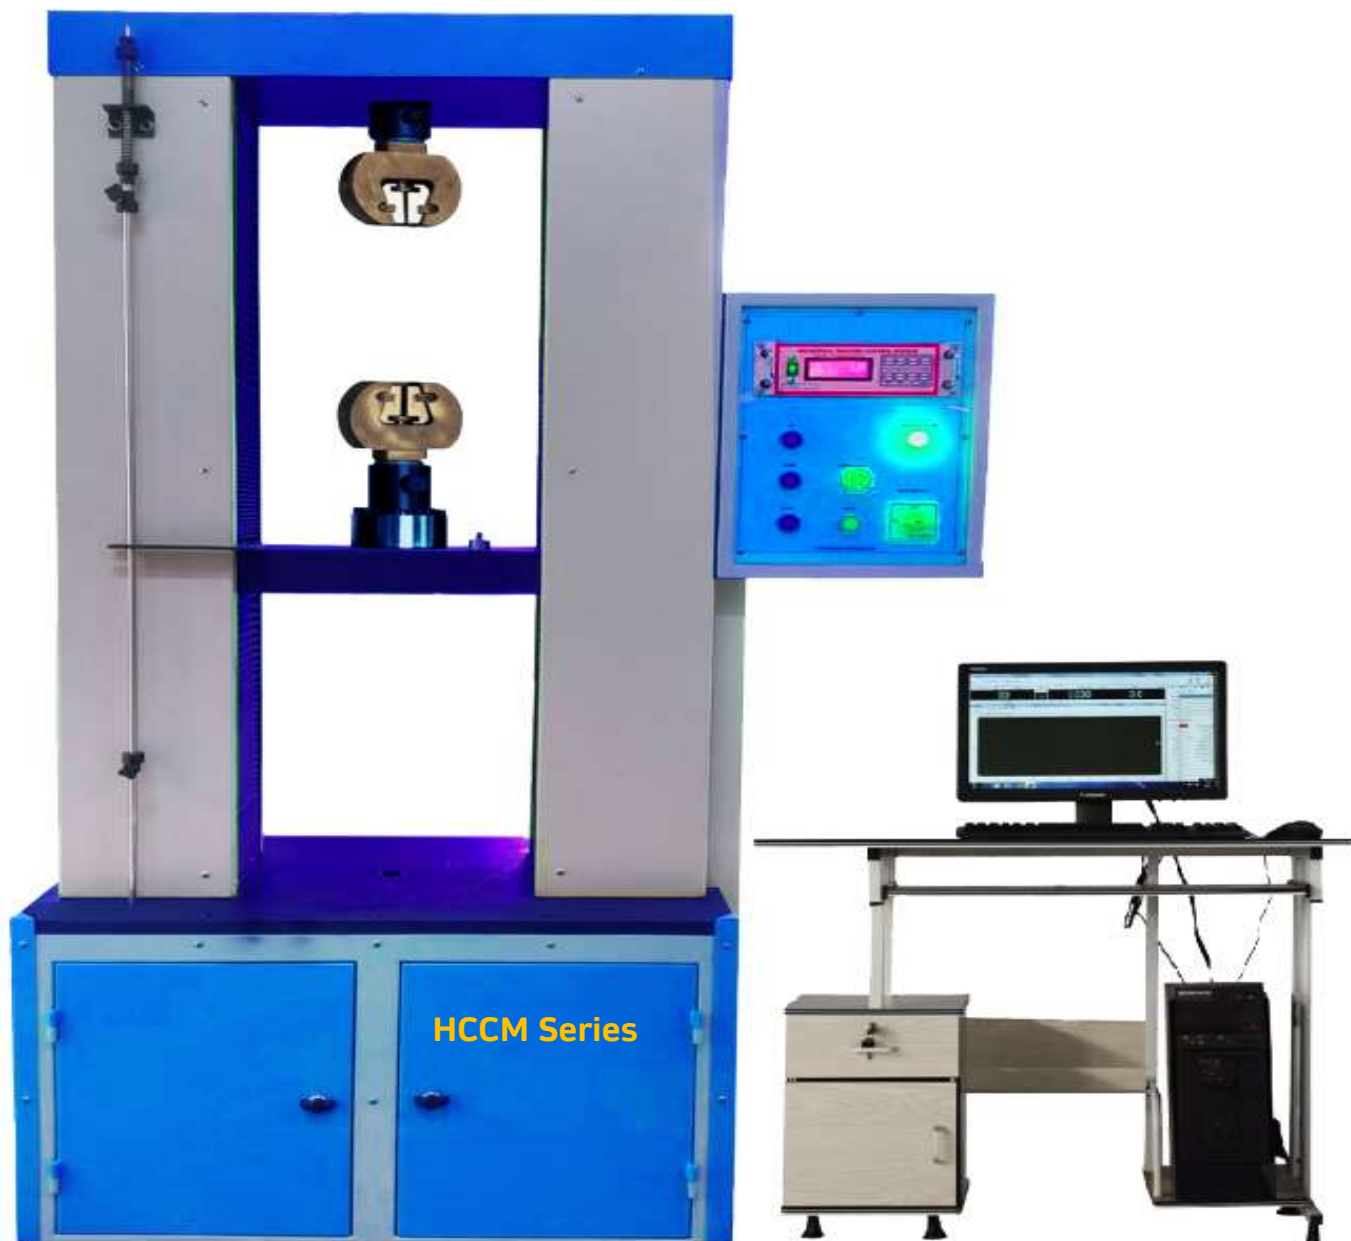

DESCRIPTION

HSMLE'S HCCM-Series electromechanical compression testing machines can perform a wide range of mechanical tests including tensile, compression, bend, peel, tear, friction, and shear testing. These systems are designed to test materials, components, and products in accordance with ASTM, ISO, and other industry standards. Compatible with hundreds of accessories for a wide range of applications, these universal testing systems are available in multiple sizes and configurations for R&D, QC, and other mechanical testing up to 100 kN force.

Registered Office: UGF-12 Ansal Plaza-1 Chiranjeev Vihar Ghaziabad-201002 (U.P.) INDIA

Workshop: Khasra No - 63 Village Bayana, Near Wave City, NH 24, Ghaziabad -201015 (U.P.) INDIA

Phone : +91- 8750305291

Email : info@hsmleindia.in / sales@hsmleindia.com

Website : www.hopesmluckyenterprises.in / www.hsmleindia.com (Under Construction)

**TECHNICAL SPECIFICATION :**

Model No.	HCCM-0.5KN	HCCM-1KN	HCCM-2.5KN	HCCM-5KN	HCCM-10KN	HCCM-25KN	HCCM-50KN	HCCM-100KN
Load Capacity	0.5Kn	1Kn	2.5kN	5Kn	10Kn	25Kn	50Kn	100Kn
Load L.C.	0.1N		1N		0.01Kn			0.1Kn
Compression space	300mm			800mm				
Testing Speed	Step-less speed of 2.5 to 25mm/min OR 5 to 50mm/min OR 10 to 100mm/min OR 50 to 500mm/min							
Elongation L.C.	0.1mm with digital rotary encoder							
Motor capacity	0.5hp			1hp		2hp	3hp	
Input Power	Single phase 220V 50Hz				Three-phase 440V 50Hz			
Safety Feature	Overload Protection			Emergency Stop, Over-travel protection, Overload protection & Auto Break judgment are provided with each model				
Design Feature	Heavy duty 'Best in class twin guided double pillar design for best stability and higher stiffness							

DIGITAL READ OUT (DAQ), DATA ACQUISITION SYSTEM) : -

High Resolution 24 Bit Adc , Ads 1232 Used For A Better Accuracy.	Peak Load And Peak Displacement Hold Facility.
2x16 or 4x20 Dot Matrix Lcd Display For Manual Operation.	Manual Entry of Speed.
8 Keys Provided for Easy Manual Operation.	Auto Calibration Through Daq.
Load Zero Facility by Key.	Overload Protection.
Displacement of Zero Facility by Key.	Over Displacement Protection
One Can Make a Manual Test with Read Out.	Extensometer And Rubber Extensometer Facility Optional.

SOFTWARE SPECIFICATIONS AND FACILITIES: -

PC Based Dynamic Software.	Statistical Analysis of Multi Report.
Fully Pc Controlled Software.	Test Report During Test.
Protection With a Password To Avoid Misuse.	Test Reports Re Call Facility from History.
Real Time Graph.	Data Back Up and Restore Facility.
Load Vs Displacement Graph. · Load Vs Time Graph.	Customer End Report Generation.
Displacement Vs Time Graph. · Stress Vs Strain Graph.	Reports Saved as Word, Excel And Pdf Format.
Single Test and Single Report.	This Software Supports Windows 7,8,10,11,
Multi-Test and Multi Report.	

Registered Office: UGF-12 Ansal Plaza-1 Chiranjeev Vihar Ghaziabad-201002 (U.P.) INDIA**Workshop:** Khasra No - 63 Village Bayana, Near Wave City, NH 24, Ghaziabad -201015 (U.P.) INDIA

Phone : +91- 8750305291

Email : info@hsmleindia.in / sales@hsmleindia.com

Website : www.hopesmluckyenterprises.in / www.hsmleindia.com (Under Construction)